

INSTALLATION INSTRUCTIONS

Direct Drive Automatic Washer Clutch Assembly - Complete

⚠ WARNING




Electrical Shock Hazard

Disconnect power before servicing.
Replace all panels before operating.
Failure to do so can result in death
or electrical shock.

Brake cam driver



Flange installed down

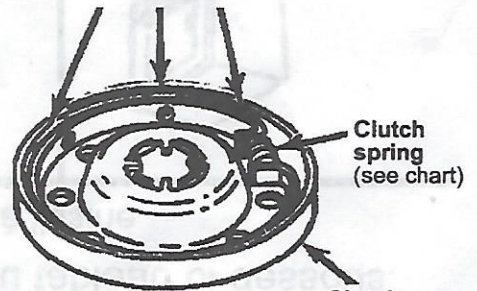

Retainer ring




Clutch assembly complete


NOTE: The "3" Pad design is also a direct replacement for the "6" Pad clutch applications. You must replace the brake cam driver, which is supplied in this kit.

To determine which clutch spring to use, match the cabinet style and width of the washer. See chart below.


NOTE: The blue clutch spring (3946792) is factory installed.

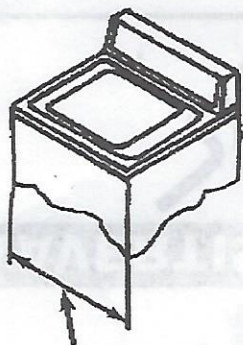


24" or 27" Regular,
large capacity. Extra
and Super capacity.
Use 3946792
blue spring.

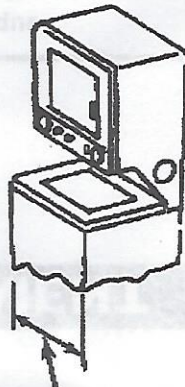

27" Over/Under
laundry system.
Use 3946792
blue spring.

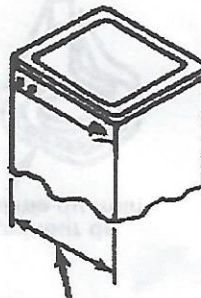

24" Compact.
Use 3946846
black spring.

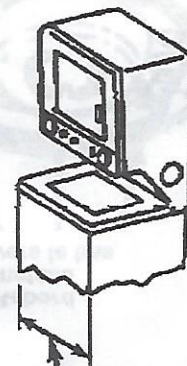

24" Over/Under
laundry system.
Use 3946846
black spring.